




SERIES 41

Nominal widths: **DN50, 65, 80, 100, 125, 155, acc. DIN PN 10/16**
Especially suitable for: **abrasive and delicate products**

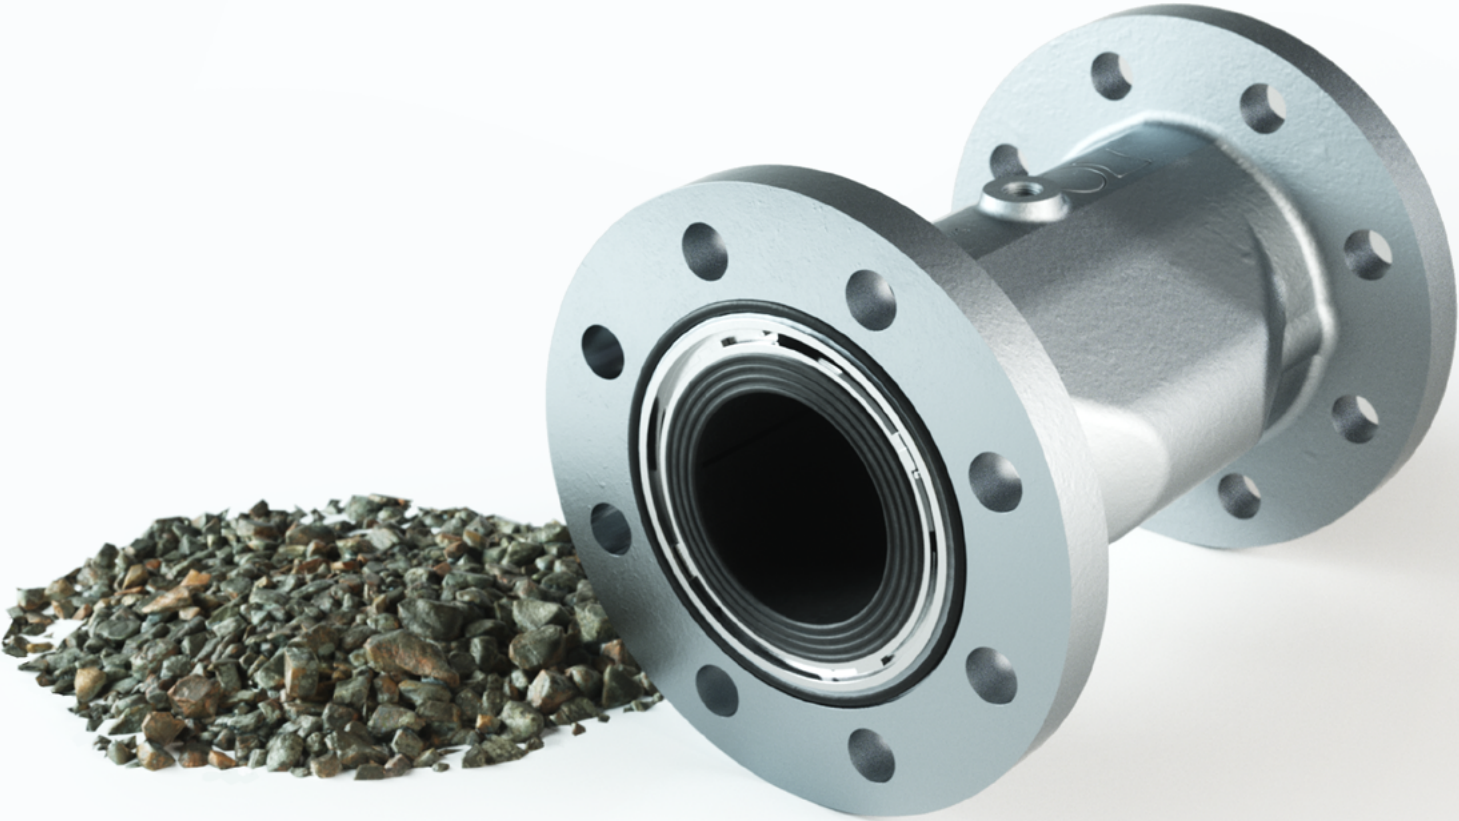

Material specifications

Sleeve
as selected

O-Ring
nitrile rubber NBR


Housing (not in contact with medium)
aluminium casting G-Al Si 7 Mg, powder-coated silver grey



Special versions on request

Assembly videos, service instructions,
spare parts, conformities etc. see: [ho-matic.ch/downloads](https://www.ho-matic.ch/downloads)

Dimensions

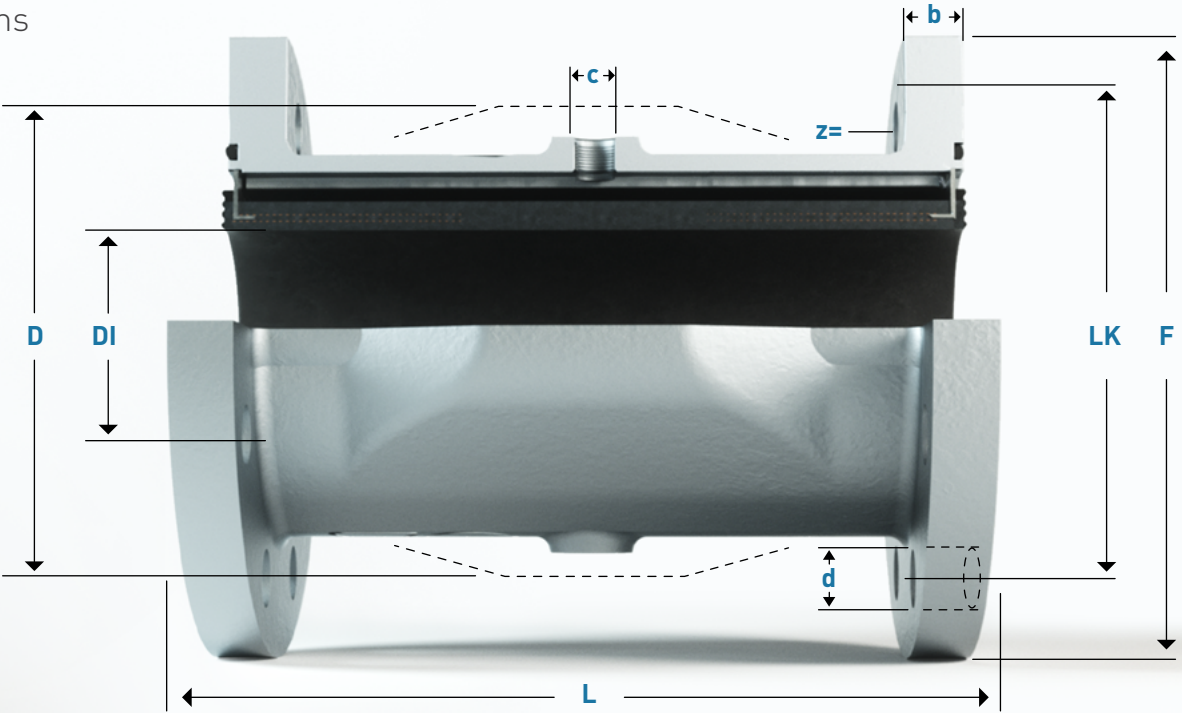

DN	DI	D	L	F	LK	d	z	b	c	Vol. l'	kg
50	50	100	165	165	125	18	4	17	G 1/4"	0,22	2,50
65	65	124	185	185	145	18	4	17	G 1/4"	0,49	3,30
80	80	152	225	200	160	18	8	18	G 1/4"	0,95	4,50
100	100	186	280	220	180	18	8	20	G 3/8"	1,80	6,60
125	125	230	350	250	210	18	8	22	G 3/8"	3,30	11,50
155	150	270	420	285	240	22	8	24	G 3/8"	6,40	17,00

Vol. l' - Control volume for closed valve

Article number

Series	DN	Sleeve Quality								Version		
		NR	NR-L	NR-LH	NBR-LH	EPDM-L	FPM	CR	CSM	Standard		
41	050.	{	001.	011.	021.	121.	201.	301.	401.	501.	000	
	065.		ATEX-Versions:					NR-E	NR-LE	NBR-LE	EPDM-LE	ATEX
	080.							031.	061.	161.	261.	022
	100.											
	125.											
	150.											

Example orders

Valve complete: 41080.001.000 | **Sleeve:** 4080.001.000 | **Spare part:**

Control | Accessories

